



# BMTS FOLDING & AUTOMATIC DOORS

PO Box 4245, Al Qusais, Dubai  
www.bmtsautomaticdoors.com  
050 565 1083 / 050 565 1084



## DOORMAN ALUMINIUM FOLDING DOOR TECHNICAL DATA

### DM - NTB65

Model Number




**Doorman Aluminium folding door system made in Italy**, offers unique and high-quality, precision engineered, multi-slide and fold door. An impressive opening apertures that can unite internal and external areas creating a unique living and social areas. Suitable for both residential and commercial applications.

A choice of opening configurations to suit any application. Choose to fold sashes internally or externally, place the opening at the side, or center opening as require.

#### Design Features

- The vent loads are transferred by roller carriers to the sill.
- The vent units must be sealed with large-volume hollow gaskets to leave a 12 mm zone unclamped.
- An adjustable frame design must allow tolerances of up to 8 mm to be taken up.
- The outer frame extensions and the inner glazing beads must be rounded ("softline")
- The opening vents must be operated with folding handles.
- Sill with outer frame profile or with flush threshold profile (only for covered installations).
- Option of ventilation with integrated turn-tilt vent.

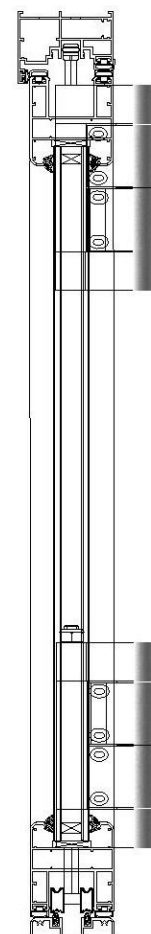

#### TECHNICAL DATA

Basic Depth Outer Frame	75mm
Basic Depth Vent Sashbar	65mm
Max Shutter Size	1000 x 3000mm
Vent Frame	70mm
Glass Thickness	6mm - 32mm
Water Tightness	8A
Windload Resistant	C3
Air permeability	klass3
Material	Aluminium & Glass
Operation	Manual with Pass Door Feature
Floor Track	Continuous or Flush